

Series  
E60/E120/E240



UL CE Ex IECEx IP68

**Economical. Eco-Friendly. Intrinsically Safe.**



Pulsarlube **E**

### Features & Advantages

#### Reliable

Less dispensing variation against ambient temperature differences due to inert Nitrogen gas generation

#### Economical

Provides low cost lubrication solution without compromising performance

#### Eco-Friendly

Eco-friendly product, where applicable parts can be disposed of separately

#### Intrinsic Safety

Certified CE, ATEX, UL for use in hazardous areas

#### Trouble-free Operation & Installation


- ▶ Various dispensing settings & grease pouch volumes to suit a wide range of industrial applications
- ▶ Easy to adjust dispensing periods, even while in operation
- ▶ Easy to install in hazardous & confined areas

### Typical Applications



- Automotives
- Motors & pumps
- Petrochemical plants
- Paper mills, steel mills, cement plants where water & excessive contaminants exist
- Electronics industries in need of small amounts of lubricant (60ml)

### Details

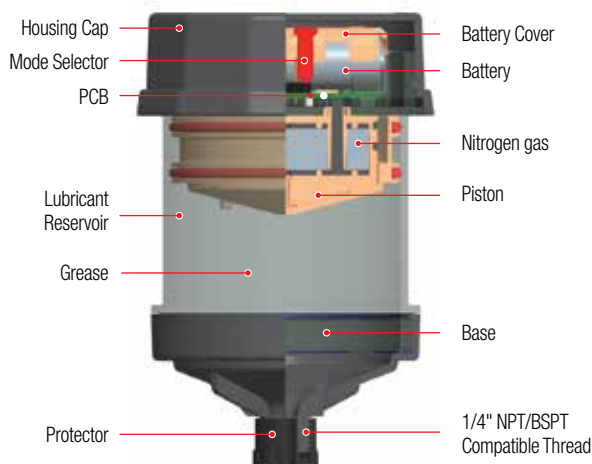

### Specifications

#### Grease Capacity

60 ml / 120 ml / 240 ml (disposable)

#### Gas Type

Nitrogen (N<sub>2</sub>) gas

#### Gas Generating Method

Electrochemical reaction

#### Operating Pressure

Max. 5 kgf/cm<sup>2</sup> (70 psi)

#### Operating Temperature

-20°C ~ 55°C (-4°F ~ 131°F)

#### Dispensing Periods

1, 3, 6, 9 & 12 month

#### Product Certifications & IP Code

ATEX / UL / IECEx / KCs / CE / IP68

#### Remote Installation

Max. 1 m (3ft) with Ø8mm tube

#### Multi-Point Installation

Not Applicable